



DSK24L

Surface Mount Low VF Schottky Rectifiers

Reverse Voltage - 40 V

Forward Current - 2.0A

Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

MECHANICAL DATA

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00048oz

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View
Marking Code: K24L
Simplified outline SOD-123FL and symbol

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	DSK24L	Units
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	40	V
Maximum RMS voltage	V _{RMS}	28	V
Maximum DC Blocking Voltage	V _{DC}	40	V
Maximum Average Forward Rectified Current at T _c = 100 °C	I _{F(AV)}	2	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I _{FSM}	50	A
Maximum Instantaneous Forward Voltage at 2 A	V _F	0.45	V
Maximum DC Reverse Current T _a = 25 °C at Rated DC Blocking Voltage T _a = 100 °C	I _R	0.5 10	mA
Typical Junction Capacitance ⁽¹⁾	C _j	290	pF
Typical Thermal Resistance ⁽²⁾	R _{θJA}	70	°C/W
Operating Junction Temperature Range	T _j	-55 ~ +150	°C
Storage Temperature Range	T _{stg}	-55 ~ +150	°C

(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



Characteristic Curves ($T = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

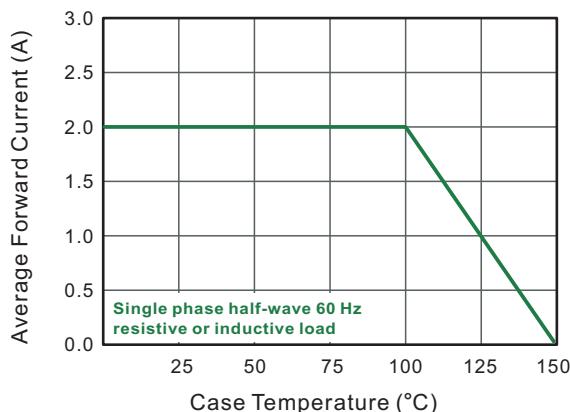


Fig.2 Typical Reverse Characteristics

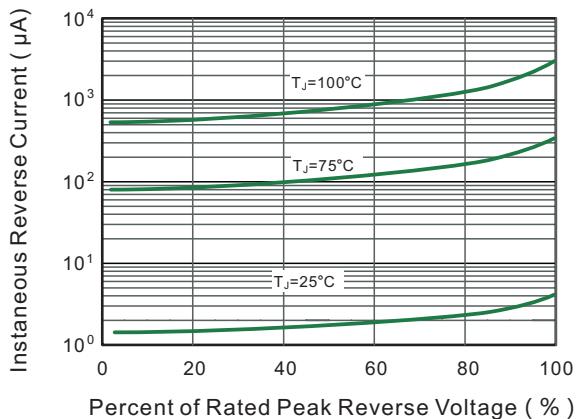


Fig.3 Typical Forward Characteristic

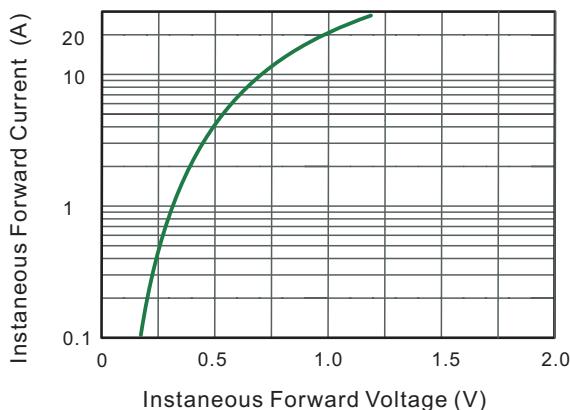


Fig.4 Typical Junction Capacitance

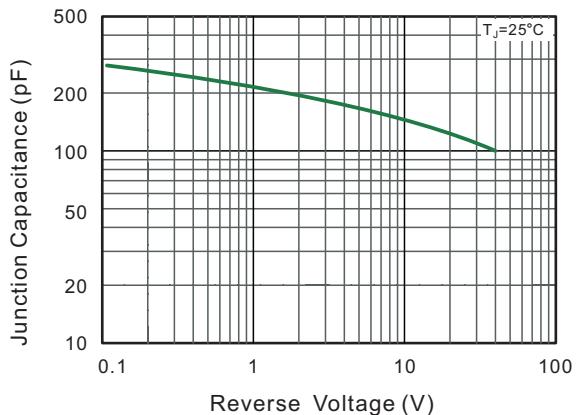


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


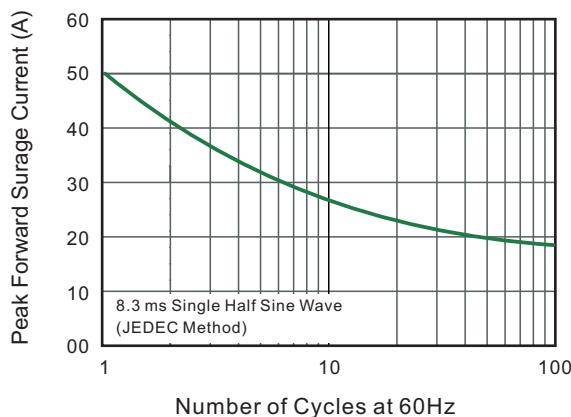


Fig.6- Typical Transient Thermal Impedance




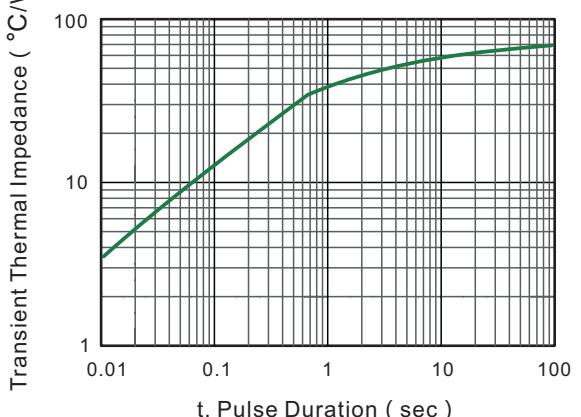

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123FL

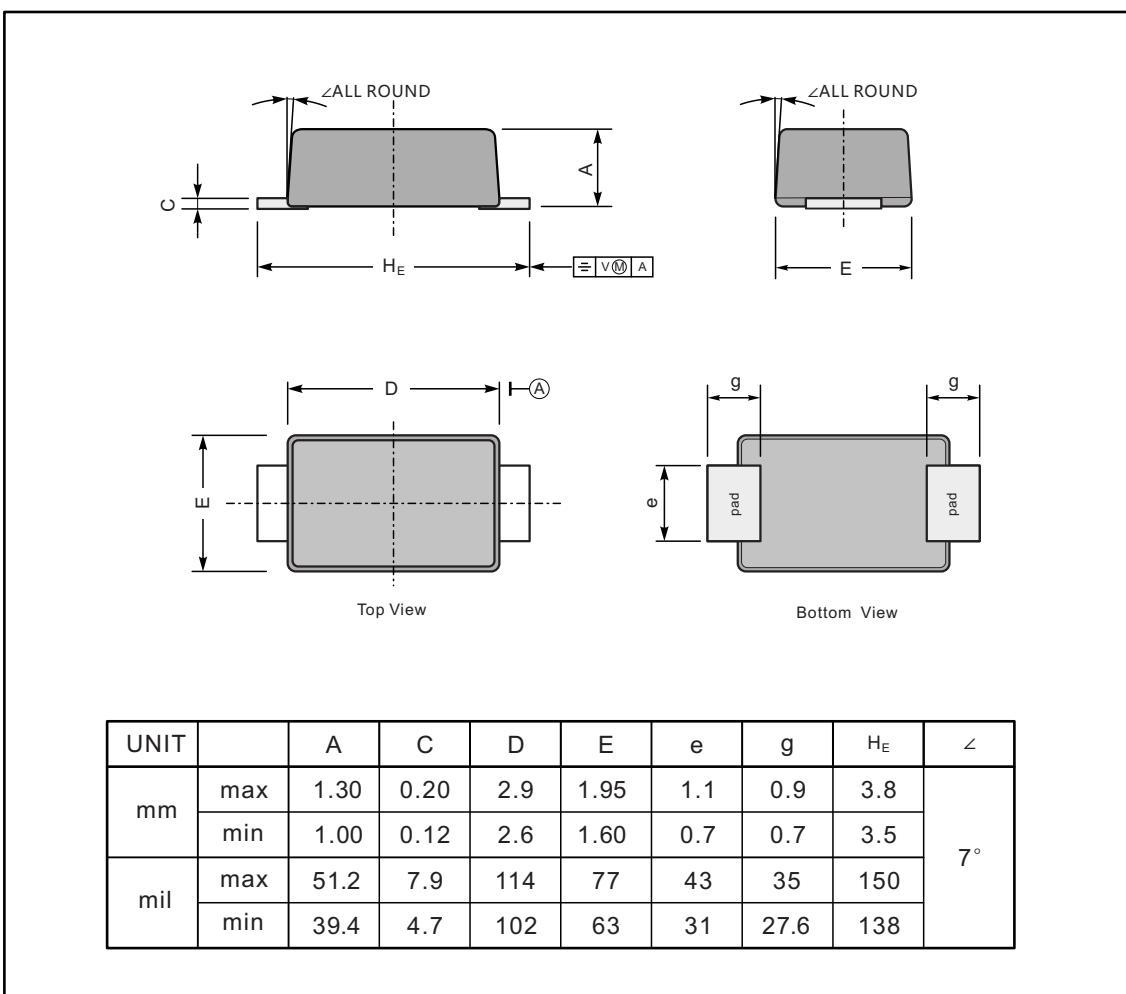

UNIT		A	C	D	E	e	g	H _E	<
mm	max	1.30	0.20	2.9	1.95	1.1	0.9	3.8	7°
	min	1.00	0.12	2.6	1.60	0.7	0.7	3.5	
mil	max	51.2	7.9	114	77	43	35	150	
	min	39.4	4.7	102	63	31	27.6	138	

The recommended mounting pad size

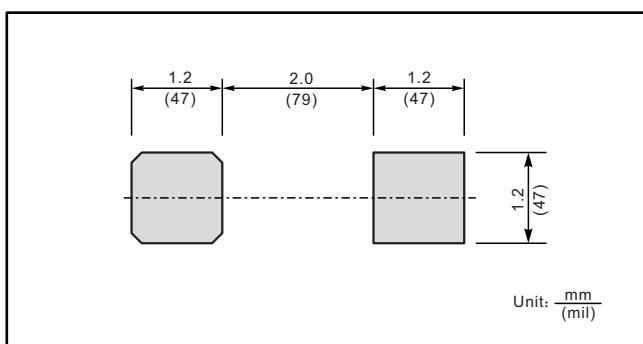

Marking

Type number	Marking code
DSK24L	K24L